LEDSION

3WATTS 3CCT LED WRAPAROUND

Date: ---------- Location: ----------

Product: ---------- Project: ----------

Quantity: ---------- Catalog# ----------





FEATURES

- 4ft 30/40/50W 3/4/5K tunable wrap, EM available
- 5.9" wide, Easy installation and maintenance
- Corrosion and rust proof. IP40 RATED DLC UL
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Indoor office Lighting
- Hospital lighting
- Shopping malls
- School lighting
- Warehouse lighting
- Hallway lighting

CONSTRUCTION:

Die formed of 0.6mm cold-rolled steel body, All steel surface painted after fabrication with high gloss backed white powder painted extruded opal prismatic material with uv protection. End caps:white pc material.

ELECTRICAL:

Available as 120-277V input. dim0-10V-22°F to104°F.

INSTALLATION&MOUNTING:

Surface mount or Suspension Mount (order extra)

OPTICALSYSTEM:

High brightness2835LED chips. High quality tem pc optics.110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment application.

PERFORMANCE:

Model NO	SIZE	3 Watts Select	Voltage	Light Efficiency	3 CCT Select
LS-WRA50W-TN	4FT	30W/40W/50W	120-277V	115LM/W	3500K/4000K/5000K

Electric Characteristic


Model	Certificate	Input power	Lumens output	Efficiency	CRI	Color Temperature	lamps efficiency	Equivalent
LS-WRA50W-TN	UL DLC	30W/40W/50W	3450/4600/5750LM	115LM/W	>80	3500-5000K	⩾90%	115-150W MH/HPS

OPTIONAL ACCESSORIES



Emergency Battery Backup:
LSED8W60300V


Electric Characteristic



WARNING

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

DISTRIBUTION DIAGRAM

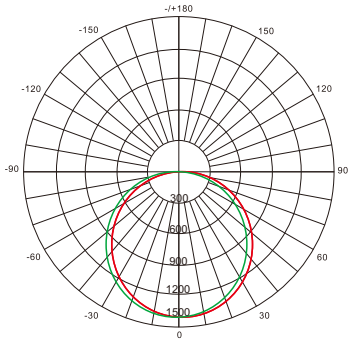

AVERAGE BEAM ANGLE(50%): 113°

Test Number: LS-WRA50W
Lumens:4600LM
Test Number:30W/40W/50W
Test Number:3500K/4000K5000K


UNIT:CD
C0/180,110.9
C30/210,110.5
C60/240,109.3.
C90/270,109.1

PACKAGE/WEIGHT

Model No	Size	Master Carton Size	Qty/Carton	Weight
		(LxWxH)		LBS
LS-WRA50W-TN	4FT	48.62 "X 13.58 "X 10.04 "	4	20.3lbs


LED Wraparound

Installation

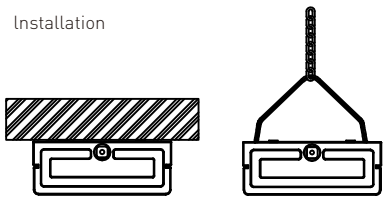


Surface Mounting Suspension Mounting


1

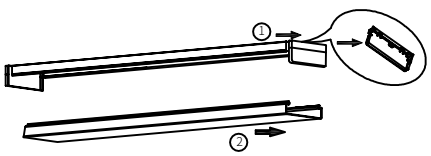

2

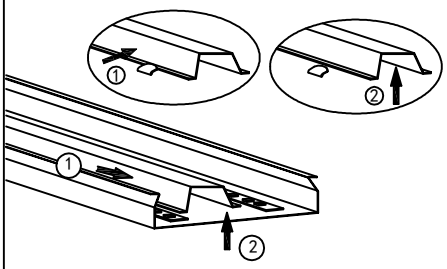


3

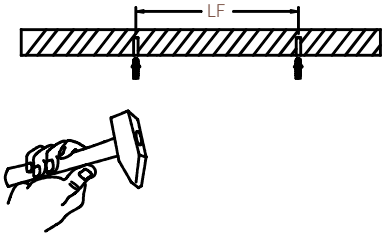

4

Surface Mounting

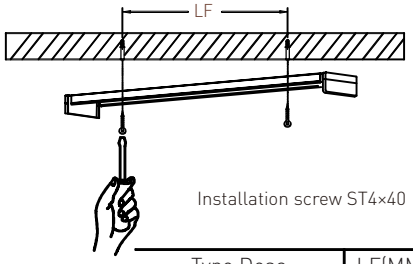


Installation screw ST4×40

Type Desc	LF(MM)
LS-WRA50W-35/40/50K	938

5


Surface Mounting

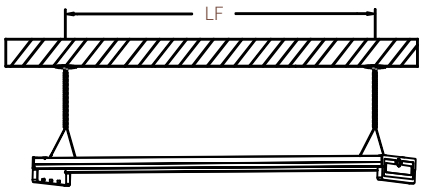


Autogamy hanging rope

Type Desc	LF(MM)
LS-WRA50W-35/40/50K	1115

6

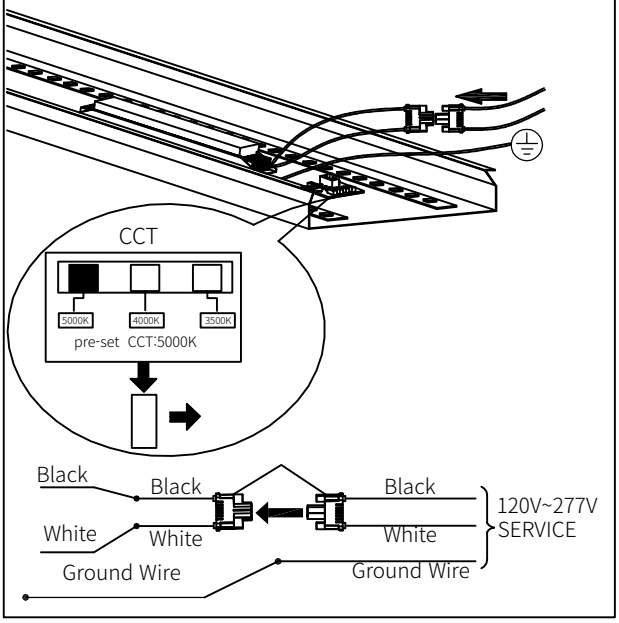

7

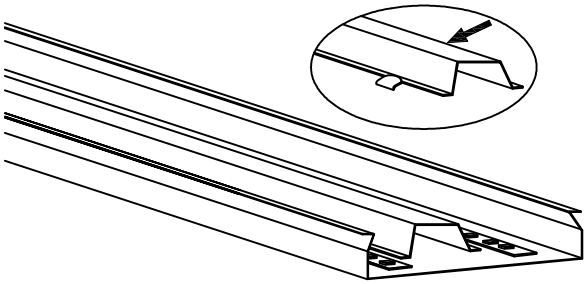

8

